


# PCI-1710U/UL

# PCI-1710HGU

100 kS/s, 12-bit, 16-ch Universal PCI Multifunction Card

100 kS/s, 12-bit, 16-ch Universal PCI Multifunction Card with High Gain

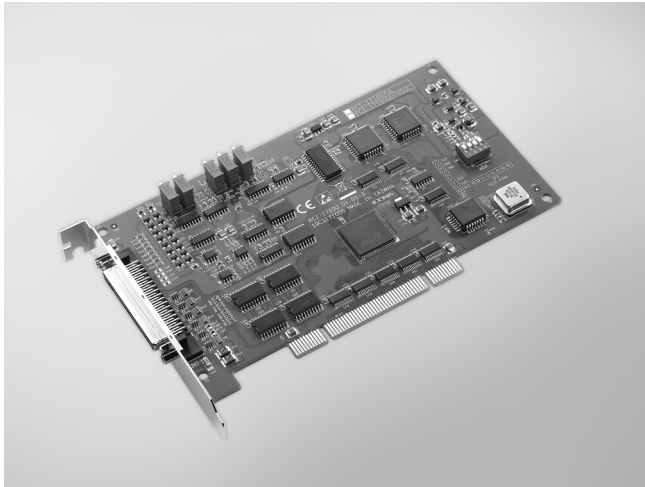

## Features

- 16-ch single-ended or 8-ch differential or a combination of analog input
- 12-bit A/D converter, with up to 100 kHz sampling rate
- Programmable gain
- Automatic channel/gain scanning
- Onboard FIFO memory (4,096 samples)
- Two 12-bit analog output channels (PCI-1710U/HGU only)
- 16-ch digital input and 16-ch digital output
- Onboard programmable counter
- BoardID™ switch

## Specifications

### Analog Input

- **Channels** 16 single-ended/ 8 differential (software programmable)
- **Resolution** 12 bits
- **FIFO Size** 4,096 samples
- **Overvoltage Protection** 30Vp-p
- **Input Impedance** 300 MΩ
- **Sampling Modes** Software, onboard programmable pacer and external
- **Input Range** (V, software programmable)

PCI-1710U/UL					
Gain	0.5	1	2	4	8
<b>Bipolar</b>	±10	±5	±2.5	±1.25	±0.625
<b>Unipolar</b>	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
<b>Accuracy (% of FSR ±1LSB)</b>	0.1	0.1	0.2	0.2	0.4

PCI-1710HGU								
Gain	0.5	1	5	10	50	100	500	1000
<b>Bipolar</b>	±10	±5	±1	±0.5	±0.1	±0.05	±0.01	±0.005
<b>Unipolar</b>	N/A	0 ~ 10	N/A	0 ~ 1	N/A	0 ~ 0.1	N/A	0 ~ 0.01
<b>Accuracy (% of FSR ±1LSB)</b>	0.1	0.1	0.2	0.2	0.4	0.4	0.8	0.8

- **Maximum Sampling Rate** (S/s, depending on PGA setting time)

Model	Gain	Max. Sampling Rate
PCI-1710U/UL	0.5, 1, 2, 4, 8	100 kS/s
PCI-1710HGU	0.5, 1	100 kS/s
	5, 10	35 kS/s
	50, 100	7 kS/s
	500, 1000	770 S/s

### Analog Output (PCI-1710U/HGU only)

- **Channels** 2
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** (V, software programmable)

Internal Reference	Unipolar	0 ~ +5V @ -5V 0 ~ +10V @ -10V
<b>External Reference</b>		0 ~ +xV @ -xV (-10 ≤ x ≤ 10)

- **Slew Rate** 10 V/μs
- **Driving Capability** 3 mA
- **Operation Mode** Software polling
- **Accuracy** INLE: ±0.5 LSB, DNLE: ±0.5 LSB

### Digital Input

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.

### Digital Output

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.8 V max.  
Logic 1: 2 V min.  
Sink: 8.0 mA @ 0.8 V  
Source: -0.4 mA @ 2.0 V
- **Output Capability**

### Pacer/Counter

- **Channels** 1
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 10 MHz

### General

- **Bus Type** Universal PCI V2.2
- **I/O Connector** 1 x 68-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA  
Max.: 5 V @ 1.0 A
- **Operating Temperature** 0 ~ 60° C (32 ~ 140° F) (refer to IEC 68-2-1, 2)
- **Storage Temperature** -20 ~ 70° C (-4 ~ 158° F)
- **Storage Humidity** 5 ~ 95% RH non-condensing (refer to IEC 68-2-3)

## Ordering Information

- **PCI-1710U** 100 kS/s, 12-bit Multifunction Card
- **PCI-1710UL** 100 kS/s, 12-bit Multifunction Card w/o AO
- **PCI-1710HGU** 100 kS/s, 12-bit High-gain Multifunction Card

### Accessories

- **PCLD-8710** DIN-rail Wiring Board w/ CJC
- **PCL-10168-1** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2** 68-pin SCSI Shielded Cable, 2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board