


PCI-1723

16-bit, 8-ch Analog Output PCI Card with 16-ch Digital I/O

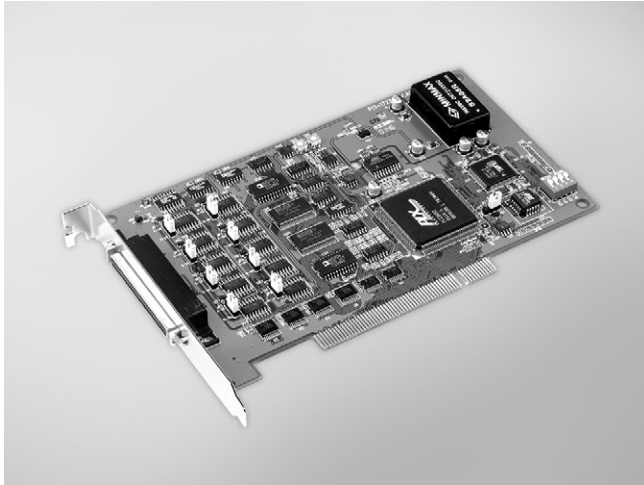

Features

- Auto calibration function
- A 16-bit DAC is equipped for each analog output channel
- Synchronized output function
- Keeps the output settings and values after system hot reset
- 2-port (16-channel) user-defined digital input/output channels
- BoardID™ switch

Introduction

PCI-1723 is a non-isolated multiple channel analog output card for the PCI bus, and each analog output channel is equipped with a 16-bit, double-buffered DAC. It also features an auto-calibration function and a BoardID™ switch. The PCI-1723 is an ideal solution for industrial applications where multiple analog output channels are required.

Specifications

Analog Output

- **Channels** 8
- **Resolution** 16 bits
- **Output Rate** Static update
- **Output Range** (Software programmable)

Internal Reference	Bipolar (V)	±10
	Current Loop (mA)	0 ~ 20, 4 ~ 20

- **Driving Capability** 5 mA
- **Output Impedance** 0.1 Ω max.
- **Operation Modes** Software polling, synchronized output
- **Accuracy** Relative: ±6 LSB
Differential Non-linearity: ±6 LSB (monotonic)

Digital Input/Output

- **Channels** 16 (shared by input/output)
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.
Logic 1: 2.0 V min.
- **Output Capability** Sink: 0.5 V @ 24 mA
Source: 2.0 V @ -15 mA

General

- **Bus Type** PCI V2.2
- **I/O Connectors** 1 x 68-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: +5 V @ 850 mA, +12 V @ 600 mA
Max.: +5 V @ 1 A, +12 V @ 700 mA
- **Operating Temperature** 0 ~ 60° C (32 ~ 158° F) (IEC 68-2-1, 2)
- **Storage Temperature** -20 ~ 85° C (-4 ~ 185° F)
- **Storage Humidity** 5 ~ 95 % RH non-condensing (IEC 68-2-3)
- **Certifications** CE

Ordering Information

- **PCI-1723** 16-bit, 8-ch Non-isolated Analog Output PCI Card
- **PCL-10168-1** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2** 68-pin SCSI Shielded Cable, 2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

Pin Assignments

NC	68	34	NC
Vout0	67	33	Vout1
AGND	66	32	AGND
Iout0	65	31	Iout1
NC	64	30	NC
AGND	63	29	AGND
Vout2	62	28	Vout3
AGND	61	27	AGND
Iout2	60	26	Iout3
NC	59	25	NC
AGND	58	24	AGND
Vout4	57	23	Vout5
AGND	56	22	AGND
Iout4	55	21	Iout5
NC	54	20	NC
AGND	53	19	AGND
Vout6	52	18	Vout7
AGND	51	17	AGND
Iout6	50	16	Iout7
NC	49	15	NC
AGND	48	14	AGND
DIO0	47	13	DIO1
DIO2	46	12	DIO3
DIO4	45	11	DIO5
DIO6	44	10	DIO7
DIO8	43	9	DIO9
DIO10	42	8	DIO11
DIO12	41	7	DIO13
DIO14	40	6	DIO15
DGND	39	5	DGND
NC	38	4	NC
NC	37	3	NC
NC	36	2	NC
+12V	35	1	+5V